


PACKAGED ZINC ANODES SINGLE TYPE

Pre-packaged Zinc Anodes for use in Cathodic Protection or Earthing applications.

Zinc Anodes can be provided pre-packaged in a 50/50 mix of gypsum and bentonite to ensure good surface contact and high working efficiency.

DATASHEET 2.6

PACKAGED ZINC ANODES

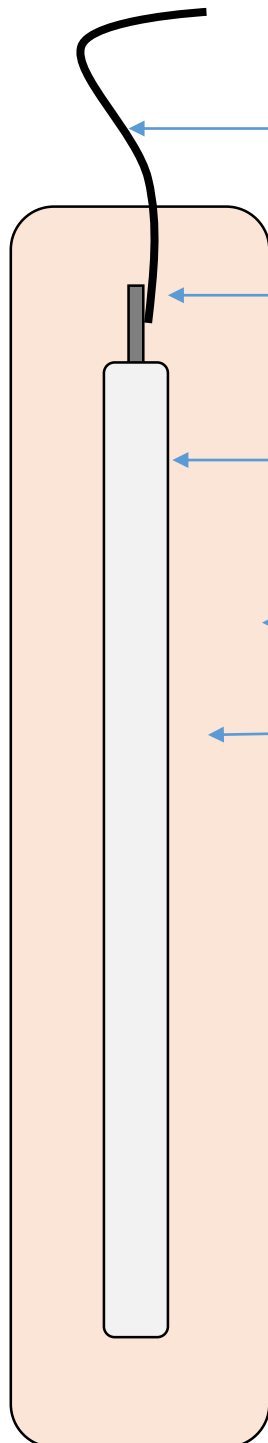

Cable Tail : 10m of 25mm² XLPE/PVC or as required.

Cable brazed to steel insert

Zinc Anode 50 x 50 x 1,500mm or 35mm x 35mm x 1,500mm

Cotton bag, approx. dimensions 150 dia x 2,000mm

50% gypsum / 50% bentonite backfill or as required.

CHEMICAL COMPOSITION

	Type I	Type II
Aluminium :	0.1-0.5	0.005% max
Cadmium :	0.02-0.07	0.003% max
Iron :	0.005% max	0.0014% max
Lead :	0.006% max	0.003% max
Copper	0.006% max	0.002% max
Zinc :	Balance	Balance



BAC[®]

CORROSION CONTROL

BAC Corrosion Control Ltd
Stafford Park 11 • Telford • TF3 3AY
United Kingdom

T: +44 (0) 1952 290 321
E: sales@bacgroup.com
W: www.bacgroup.com


PACKAGED ZINC ANODES TWIN ELECTRODE TYPE

Pre-packaged Zinc Anodes for use in Cathodic Protection or Earthing applications.

Zinc Anodes can be provided pre-packaged in a 50/50 mix of gypsum and bentonite to ensure good surface contact and high working efficiency.

DATASHEET 2.6

PACKAGED ZINC ANODES

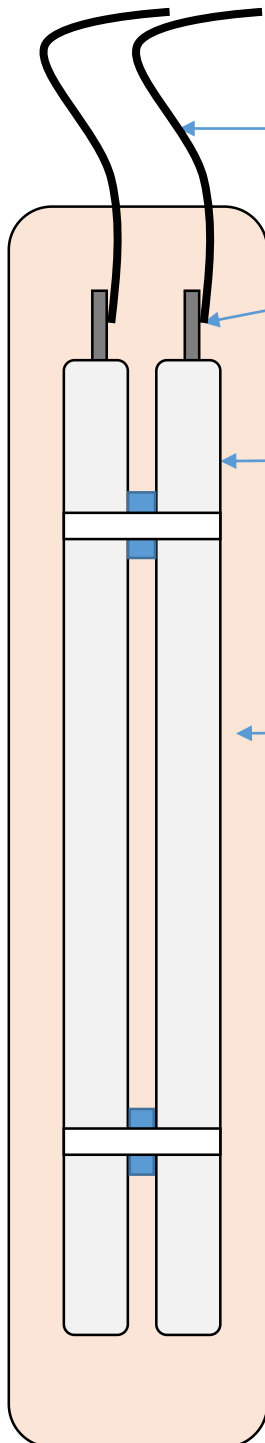

Cable Tails : 10m of 25mm² XLPE/PVC or as required.

Cable brazed to steel insert

Zinc Anodes 50 x 50 x 1,500mm or 35mm x 35mm x 1,500mm

Cotton bag, approx. dimensions 150 dia x 2,000mm

50% gypsum / 50% bentonite backfill or as required.

CHEMICAL COMPOSITION

	Type I	Type II
Aluminium :	0.1-0.5	0.005% max
Cadmium :	0.02-0.07	0.003% max
Iron :	0.005% max	0.0014% max
Lead :	0.006% max	0.003% max
Copper :	0.006% max	0.002% max
Zinc :	Balance	Balance



BAC[®]

CORROSION CONTROL

BAC Corrosion Control Ltd
Stafford Park 11 • Telford • TF3 3AY
United Kingdom

T: +44 (0) 1952 290 321
E: sales@bacgroup.com
W: www.bacgroup.com